



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Steel EXIT-EM combination unit with CT symbol of access
- Features two fully adjustable heads
- Designed for ceiling and wall mounting

CONSTRUCTION

- 20-gauge steel construction
- Field selectable chevron directional indicator offers a choice of direction on site
- 6" EXIT letters with 3/4" stroke and CT symbol of access

LAMP

- Utilizes two 1W LED heads with 360° of adjustability in emergency mode
- Exit face is illuminated by long-lasting high-output AlInGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Brownout protection
- Low-voltage disconnect
- AC indicator light with test switch

BATTERY

- Nickel-cadmium battery comes standard
- Operating temperature range: 0 °C to 40 °C
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-8ST-200-LED-HC-CT

COMBO UNIT WITH CT SYMBOL OF ACCESS



DIMENSIONS

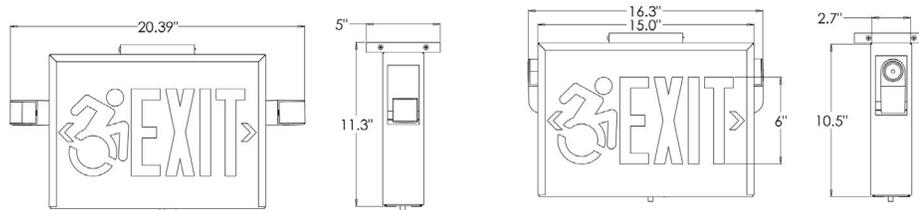

Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Wall / Ceiling	Nickel-cadmium	UL 924	20.39" W X 11.3" H X 5" D

ORDERING GUIDE

MODEL	NUMBER OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
LG-8ST-200-LED-HC-CT	1	R	W	220 220 VAC Input
	2	G	B	