



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Rugged steel recessed emergency light
- Designed for recessed ceiling mounting
- Ideal for areas where sealed beam directional lighting is not required

CONSTRUCTION

- Rugged steel construction with a photometrically-optimized reflector system shielded by a UV-stabilized 0.125" thick prismatic lens
- Available in custom colors and finishes; consult factory for options
- Optional mounting bars (CAD-24) available for fast installation in suspended ceilings

LAMP

- Utilizes two 1W LED lamps
- Features a precision-formed alzak reflector system for broad, evenly distributed lighting

ELECTRONICS

- Dual voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

COMPLIANCE


- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY



- 5-year warranty on housing and electronics. Battery is prorated

ASQ-R-LED

RECESSED EMERGENCY LIGHTING UNIT

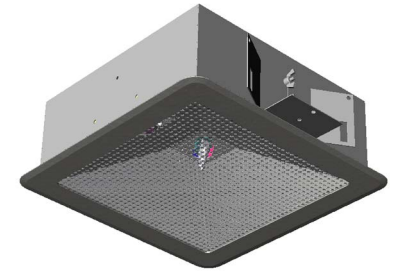

DIMENSIONS



Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Ceiling	Nickel Cadmium	UL 924	13" W X 13" H X 4" D

ORDERING GUIDE

MODEL	HOUSING COLOR		LAMPING	DC VOLTAGE		OPTIONS	
ASQ-R-LED Recessed Ceiling Emergency Light	B	Black	2x1	6	6 VDC	220	220 VAC Input
	W	White				SD	Self Diagnostics
						CAD-24	Caddy-bars
						REM	Remote Capable
						DL	Damp Location
						BH¹	Battery Heater
						TD²	Time Delay
						NC	Nickel-cadmium battery

Notes:

1. Standard with Self Diagnostic
2. Must Specify AC Input Voltage and Delay Time