



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Edgelit exit sign with extruded aluminum trim
- Face design feature 6" EXIT with CT symbol of access
- Designed for recessed ceiling and wall mounting

### CONSTRUCTION

- Aluminum housing and acrylic panel
- Replaceable chevron directional indicator offers a choice of direction on-site
- Acrylic face panels feature 6" EXIT letters with 3/4" stroke and CT symbol of access

### LAMP

- AlGaIn LED with a rated life of 10+ years

### ELECTRONICS

- Dual voltage input 120/277V 60Hz
- Test switch and LED AC indicator light
- Brownout protection

### BATTERY

- EM option comes standard with nickel-cadmium battery, and provides a minimum of 90 minutes of illumination upon loss of power
- Operating Temperature Range: 0-40° C

### COMPLIANCE

- Meets UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5 Years on housing and electronics.
- Battery is pro-rated

## ELX-HC-CT-UNVRC

RECESSED EDGELIT EXIT SIGN WITH CT SYMBOL OF ACCESS



## DIMENSIONS

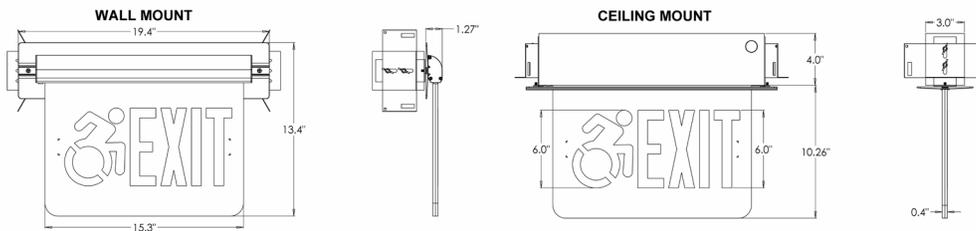

Material	Mounting	Battery	Code Compliance
Aluminum Trim / Acrylic Panel	Wall or Ceiling	Nickel-cadmium	UL924

## ORDERING GUIDE

MODEL	NUMBER OF FACES	LETTER/BACKGROUND	TRIM COLOR	POWER CONFIGURATION	OPTIONS
ELX-HC-CT-UNVRC	1 Single 2 Double	RC <sup>1</sup> Red on Clear RW Red on White RM Red on Mirrored RB Red on Black	BA Brushed Aluminum WHT White BLK Black	AC AC Only EM Battery Backup 220 220 VAC Input DI Two-Input Transformer	SD Self Diagnostics SW Special Wording CAD Caddy Bars

Notes:  
 1. Single face only