



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- NEMA 4x high-capacity emergency unit
- Remote capable: 125, 150, or 200W unit capacity
- Designed for indoor or outdoor use

### CONSTRUCTION

- Constructed from UV-stabilized UL 94-5VA flammability-rated PC/PBT blended plastic
- Mounted with four flange-style feet

### LAMP

- Choice of no heads, two heads, or three heads
- Side or top mounted PAR36 lamp heads; can be ordered with steel lamp housing

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation

- Brownout protection

### BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets IP65 of IEC529 and NEMA 1, 2, 4, and 4x specifications
- UL listed to UL508-4x requirements

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## EU-HD-4X

125 TO 200 WATT EMERGENCY LIGHT



## DIMENSIONS

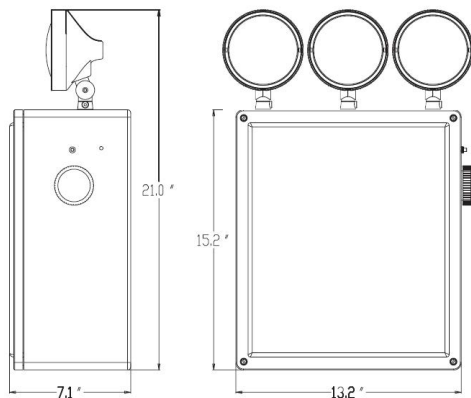

## ORDERING GUIDE

MODEL	VOLTAGE	UNIT WATTAGE	HEAD CONFIGURATION	LAMP TYPE	OPTIONS
<b>EU-HD-4X</b> NEMA 4x Heavy Duty Emergency Unit	<b>6</b> 6V <b>12</b> 12V	<b>125</b> 125W <b>150</b> 150W <b>200</b> 200W	<b>NH</b> No Heads <b>2S</b> 2 Side Heads <b>2T</b> 2 Top Heads <b>3T<sup>2</sup></b> 3 Top Heads	<b>A6</b> 6V 5.4W Wedge Base Lamp <b>B6</b> 6V 10W Bi-Pin Halogen <b>C6</b> 6V 12W Sealed Beam Halogen <b>A12</b> 12V 25W Incandescent <b>B12</b> 12V 50W Incandescent	<b>LC</b> 3 Feet Line Cord <b>220</b> 220 VAC 50/60 Hz <b>TD<sup>1</sup></b> Time Delay

### Notes:

1. Time delay must specify AC input voltage and delay time in minutes
2. Special cabinet