



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Extruded aluminum edgelit combo with the CT symbol of access
- Slim profile design
- Designed with the CT symbol of access
- Available for ceiling or wall mounting

### CONSTRUCTION

- Extruded aluminum trim with die cast mounting plate
- Field-selectable chevron directional indicator offers a choice of direction on-site
- Face panel features 6" EXIT letters with 3/4" stroke, and CT Symbol of Access; 100ft viewing distance

### LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options
- Face panel illuminated by AlInGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Brownout protection
- Low-voltage disconnect
- AC indicator light with test switch

### BATTERY

- Nickel-cadmium battery is standard
- Operating temperature range: 0 °C to 40 °C
- Provides a minimum of 90 minutes of illumination in emergency mode

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## LG-700-LED-HC-CT

EDGEKIT EMERGENCY COMBO WITH CT SYMBOL OF ACCESS



## DIMENSIONS

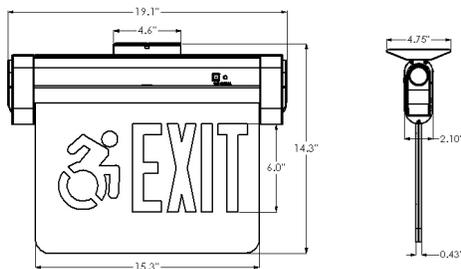

Material	Mounting	Battery	Code Compliance	Dimensions
Aluminum	Wall/Ceiling	Nickel-cadmium	UL 924	19.1" W X 14.3" H X 2.1" D

## ORDERING GUIDE

MODEL	NUMBER OF FACES	LETTER/BACKGROUND	TRIM COLOR
LG-700-LED-HC-CT Edgelit Combo with CT Symbol of Access	1 Single	RC <sup>1</sup> Red Letters on Clear Background	WH White
	2 Double	RM Red Letters on Mirrored Background	BA Brushed Aluminum

### Notes:

1. Single face only