



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Remote capable extruded aluminum exit sign
- Designed for ceiling or wall mounting
- Remote capable: 2W at 6V

CONSTRUCTION

- Extruded aluminum body with acrylic panel
- Choose from five finishes: brushed aluminum, white, black, dark bronze, or brass; consult factory for custom finishes
- Field-selectable chevron directional indicator offers a choice of direction on-site
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- AllInGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination upon loss of power

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LG-750-REM

REMOTE CAPABLE EXTRUDED ALUMINUM EXIT



DIMENSIONS

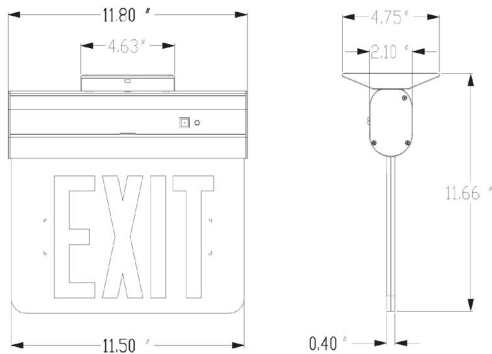

Material	Mounting	Battery	Code Compliance	Dimensions
Aluminum Housing	Ceiling / Wall	Nickel-cadmium	UL 924	11.8" W X 11.66" H X 4.75" D

ORDERING GUIDE

MODEL	NO. OF FACES	LETTER/BACKGROUND	TRIM/EXTRUSION FINISH
LG-750-REM LED Combination Unit	1 Single 2 Double	RC ¹ Red Letters on Clear Background RW Red Letters on White Background RM Red Letters on Mirrored Background RB Red Letters on Black Background GC ¹ Green Letters on Clear Background GW Green Letters on White Background GM Green Letters on Mirrored Background GB Green Letters on Black Background	BA Brushed Aluminum WHT Powder Coated White BLK Powder Coated Black DB Dark Bronze Finish BR Brass Type Face Place

Notes:

1. Single face only