



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Steel EXIT-EM combination unit with 8" letters
- Designed for use in New York City
- Features two fully-adjustable heads
- Part of Astralite's quick ship program

### CONSTRUCTION

- 20-gauge steel construction
- Field-selectable knock-out chevron directional indicators
- EXIT letters are 8" tall with 1" stroke

### LAMP

- Utilizes two 1W LED lamps in emergency mode
- EXIT face is illuminated by long-lasting high-output AlInGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Brownout protection
- Low-voltage disconnect
- AC indicator light with test switch

### BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards
- Approved for use in NYC

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## LG-8ST-200-LED

NEW YORK CITY APPROVED STEEL EXIT-EM COMBO UNIT



## DIMENSIONS

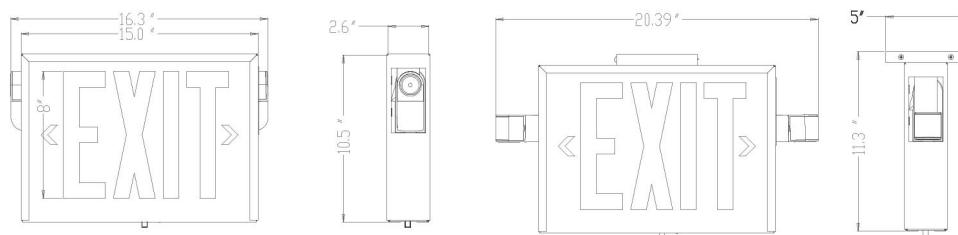

## ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR	OPTIONS
LG-8ST-200-LED	R Red	B Black W White SP <sup>1</sup> Special	220 220 VAC Input

### Notes:

1. Contact Factory for custom finishes.