

CATALOG NUMBER	TYPE		
PROJECT NAME	DATE		

SPECIFICATIONS

FEATURES

- Versatile low-profile LED fixtureDesigned for ceiling or wall mounting; quick and easy mounting to sandard electrical box

CONSTRUCTION

• UV-stable, impact-resistant thermoplastic white housing

LAMP

- Illuminated by long-lasting high-output LEDs
- Available color temperature: cool white (5000 K) or warm white (3000-3500 K)

ELECTRONICS

- Quick and easy mount to a standard electrical box.
- 120V only

COMPLIANCE

• UL listed


WARRANTY

• 3-year limited warranty

PL LED LOW PROFILE FIXTURE



DIMENSIONS

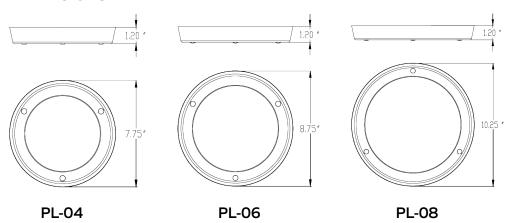

DROP DOWN LENS:



Material	Mounting	Lumens
Thermoplastic	Wall or Ceiling	330-690 Lumens

ORDERING GUIDE

	MODEL	_	SIZE	_	COLOR TEMPERATURE	_	OPTIONS
PL	Pearl LED Low Profile Fixture.	04 06 08	3W (330-380 lm) 5W (450-520 lm) 7W (590-690 lm)	ww	Cool White Warm Light	SW DDL ¹	Pull Chain Switch Drop Down Lens

Notes:

Available for PL-08 & PL-08-WW only.