



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic emergency light
- Designed to provide high levels of glare-free illumination
- Designed for wall mounting
- Remote capable: 16W, 22W, or 25W
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV stable thermoplastic construction
- Features two adjustable heads

LAMP

- Utilizes two 1W LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch

BATTERY

- Lead-calcium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode; Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

TP-100-PLUS-LED

THERMOPLASTIC EMERGENCY LIGHT



DIMENSIONS

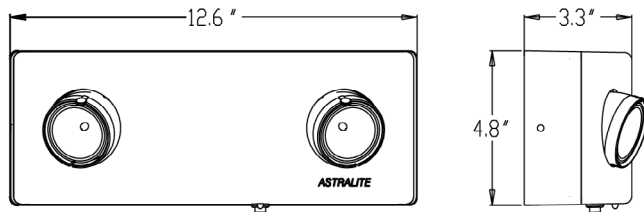

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall	Nickel-cadmium	UL 924	12.6" W X 4.7" H X 3.3" D

ORDERING GUIDE

MODEL	TOTAL DC WATTAGE	INTEGRAL LAMPS	HOUSING FINISH	OPTIONS
TP-100-LED Thermoplastic Emergency Light	16W 16 Watts 22W 22 Watts 25W 25 Watts	2x1 2 x 1 Watt LED	B Black W White	220 220 VAC Input A¹ Ammeter CP Canopy NC Nickel-cadmium Battery SD Self Diagnostics TD² Time Delay V¹ Voltmeter

Notes:

1. Select One
2. Must Specify AC Input Voltage and Delay Time