



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Contractor's choice thermoplastic exit sign
- Innovative, snap-together design allows for fast and easy installation
- Designed for wall, ceiling, or end mounting; housing snaps to canopy with a simple twist; lock tightly to secure housing to canopy
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Knockout directional indicators
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/347 VAC
- Low-voltage disconnect
- AC indicator light with test switch
- Low energy consumption - only 2W at 120V

BATTERY

- Comes standard with nickel-cadmium battery, and provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

TP-CSA

COMPACT LED EXIT SIGN



DIMENSIONS

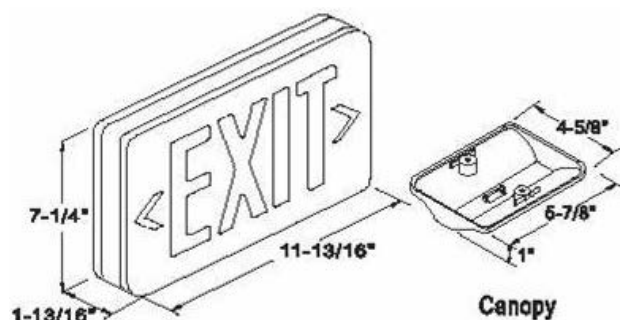

Material	Battery	Code Compliance	Dimensions
Thermoplastic	Nickel-cadmium	UL 924	12.6" W X 8" H X 4.8" D

ORDERING GUIDE

MODEL	LETTER COLOR	HOUSING COLOR
TP-CSA Compact LED Exit Sign	R Red	W White