



| | |
|----------------|------|
| CATALOG NUMBER | TYPE |
| | |
| PROJECT NAME | DATE |
| | |

SPECIFICATIONS

FEATURES

- EXIT-EM combo with waterproof polycarbonate shield
- Designed for wall and end mounting
- Part of Astralite's quick ship program

CONSTRUCTION

- Durable polycarbonate shield
- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- EXIT letters are 6" tall with 3/4" stroke; 100ft viewing distance

ILLUMINATION

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination upon loss of power
- Operating temperature range: 10-40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA101, NEC and OSHA illumination standards

COMPLIANCE


- 5-year warranty on housing and electronics. Battery is prorated

WEEU

WATERPROOF EXIT/EM COMBO



DIMENSIONS

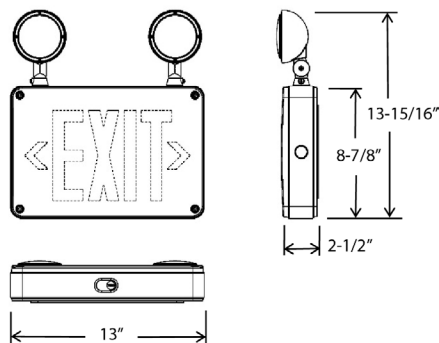

ORDERING GUIDE

| MODEL | MOUNTING | LETTER COLOR | HOUSING COLOR | OPTION |
|----------------------------|----------------|------------------------|--------------------------|--|
| WEEU Weatherproof Combo | U Universal | R Red G Green | W White B Black | SD Self Diagnostics REM Remote Capable C Cold Weather |

Notes:

1. Single face only